

HFD16


SUBMINIATURE SIGNAL RELAY



File No.: E133481



File No.: R50374275



Features

- 8A switching capability
- UL insulation system: Class F
- Plastic sealed and flux proofed types available
- Standard PCB layout
- Product in accordance to IEC 60335-1 available

RoHS compliant

CONTACT DATA

Contact arrangement	1C
Contact resistance ¹⁾	100mΩ max. (AgNi gold-plated specifications: 0.1A 30mVDC, AgNi non gold-plated specifications and AgSnO2:1A 30mVDC)
Contact material	AgNi, AgSnO2
Contact rating (Res. load)	3A 30VDC 3A 250VAC
Max. switching voltage	250VAC / 220VDC
Max. switching current	8A(30VDC)
Max. switching power	750VA / 90W
Min. applicable load	5V 1mA(Suitable for AgNi gold-plated specifications)
Mechanical endurance	1 x 10 ⁷ OPS
Electrical endurance	1x10 ⁵ OPS(NO:AgNi, 85°C, 1s on 9s off, 3A30VDC) 1x10 ⁴ OPS(NO:AgNi, 85°C, 1s on 9s off, 5A125VAC)

Notes: 1) The data shown above are initial values.
2) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)
Dielectric strength	between coil & contacts 1100VAC 1min
	between open contacts 750VAC 1min
Operate time (at rated voltage.)	5ms max.
Release time (at rated voltage.)	5ms max.
Shock resistance	Functional 147m/s ²
	Destructive 980m/s ²
Vibration resistance	Functional 10Hz to 55Hz 1.5mm DA
	Destructive 10Hz to 55Hz 3.3mm DA
Surge withstand voltage between open contacts(10/160μs)	1000V(FCC part 68)
between coil & contacts(2/10μs)	1500V(Telecordia)
Humidity	5% to 85% RH
Ambient temperature	-40°C to 85°C
Termination	PCB (DIP)
Unit weight	Approx. 4g
Construction	Plastic sealed, Flux proofed

Notes: 1) The data shown above are initial values.
2) UL insulation system: Class F.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2022 Rev. 1.00

COIL

Coil power C type: 150mW; H type: 200mW

COIL DATA

23°C

High sensitive type: (200mW)

Nominal Voltage VDC	Pick-up Voltage VDC ¹⁾ max.	Drop-out Voltage VDC min.	Max. Voltage ⁴⁾ VDC	Coil Resistance x (1±10%) Ω
2.4	1.80	0.24	4.8	28.8
3	2.25	0.3	6.0	45.0
4.5	3.38	0.45	9.0	101.3
5	3.75	0.5	10	120
6	4.50	0.6	12	180
9	6.75	0.9	18	400
12	9.00	1.2	24	700
18	13.5	1.8	36	1620
24	18.0	2.4	48	2800

Super sensitive type: (150mW)

Nominal Voltage VDC	Pick-up Voltage VDC ¹⁾ max.	Drop-out Voltage VDC min.	Max. Voltage ⁴⁾ VDC	Coil Resistance x (1±10%) Ω
2.4	1.92	0.24	4.8	38.4
3	2.40	0.3	6.0	60.0
4.5	3.60	0.45	9.0	135
5	4.00	0.5	10	166.7
6	4.80	0.6	12	240
9	7.20	0.9	18	540
12	9.60	1.2	24	960
18	14.4	1.8	36	2160
24	19.2	2.4	48	3840

Notes: (1) Energizing coil with rated voltage is basic for normal operation of a relay. Please make sure the energized voltage to relay coil have reached the rated voltage.
(2) In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.
(3) For monostable relays, if you need to drop down voltage and hold mode after reliably operating, make sure that the effective value of holding voltage is not less than 60% of the rated voltage.
(4) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.
(5) When user's requirements can't be found in the above table, special order allowed.

SAFETY APPROVAL RATINGS

UL/CUL	H High sensitive type	AgNi	5A 125VAC 1A 125VAC, 85°C 3A 30VDC, 85°C
		AgSnO ₂	1A 125VAC, 85°C 3A 30VDC, 85°C TV-1 125VAC
	C Super sensitive type	AgNi	3A 250VAC 3A 30VDC, 85°C
		AgSnO ₂	3A 250VAC 3A 30VDC, 85°C TV-1 125VAC
TÜV	H High sensitive type	AgNi	1A 250VAC 1A 125VAC, 85°C 3A 30VDC, 85°C 3A 250VAC 5A 125VAC
		AgSnO ₂	1A 125VAC, 85°C 3A 30VDC, 85°C 1(1) 250VAC 3A 250VAC

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

Type	HFD16/ 24 -Z F H -3 N (XXX)		
Coil voltage	2.4, 3, 4.5, 5, 6, 9, 12, 18, 24 VDC		
Contact arrangement	Z:1 Form C		
Construction	F: Flux proofed	Nil: Plastic sealed	
Coil power	C: Super sensitive (150mW) H: High sensitive (200mW)		
Contact material	3: AgNi	T: AgSnO ₂	
Contact plating	Nil: gold plated ^β	N: No gold plated	
Special code ¹⁾	XXX: Customer special requirement	Nil: Standard	

Notes: 1) The customer special requirement express as special code after evaluating by Hongfa.

2) The standard size of this product tube package is 409mm, Any special requirement needed, please contact us for more details.



3) Only suitable for AgNi contact specifications .

4) For products that should meet the explosion-proof requirements of "IEC 60079 series", please note [Ex] after the specification while placing orders. Not all products have explosion-proof certification, so please contact us if necessary, in order to select the suitable products.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions




(Bottom view)


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Wiring Diagram
(Bottom view)




PCB Layout
(Bottom view)




- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) The width of the gridding is 2.54mm.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

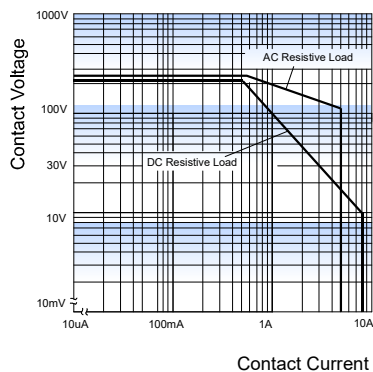

ENDURANCE CURVE

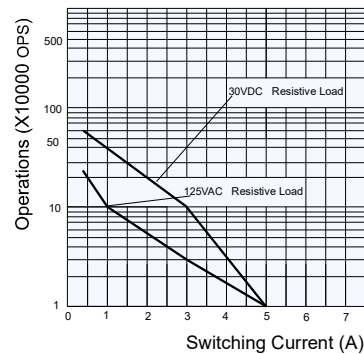

Test conditions:

NO:AgNi, Resistive load, 85°C, 1s on 9s off.

- 1) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 2) Energizing coil with rated voltage is basic for normal operation of a relay, please make sure the energized voltage to relay coil have reached the rated voltage. Regarding latching relay, in order to maintain the "set" or "reset" status, impulse width of the rated voltage applied to coil should be more than 5 times of "set" or "reset" time.
- 3) For a monosteady state relay, after the relay is reliably operated, if it needs to be kept under pressure, make sure that the effective value of the voltage is not less than 60 % of the rated voltage;
- 4) The relay may be damaged because of falling or when shocking conditions exceed the requirement.
- 5) Please use wave soldering or manual soldering for straight-in relay. If you need reflow welding, please confirm the feasibility with us.
- 6) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 7) Plastic sealed type is recommended for an environment with noxious gas such as H₂S, SO₂ and NO₂, etc., and/or when load current is low, and/or the PCB boards need to be washed after relays are soldered. For other using conditions flux proofed type could be adopted.
- 8) Regarding the plastic sealed relay, we should leave it cooling naturally until below 40°C after welding, then clean it and deal with coating, remarkably the temperature of solvents should also be controlled below 40°C. Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 9) When applied with continuous current, the heat from relay coil will age its isolation. Thus, please do not ground connected the coil to reduce electrical erosion if possible. And please provide protection circuit to avoid broken wire and losses.
- 10) Please make sure that there are no silicon-based substances (such as silicon rubber, silicone oil, silicon-based coating agents, silicon fillers, etc.) around the relay, because it will generate silicon-containing volatile gas, which may cause poor contact in case of silicon-containing volatile gas sticking on contact
- 11) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidelines of relay".

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.