



線材規格書

Cable Data Sheet


Products: 4 -Wire Touch Cable A402

Part Number : AMT 94-51040-000

創為精密材料股份有限公司
Apex Material Technology Corp.

Approved by



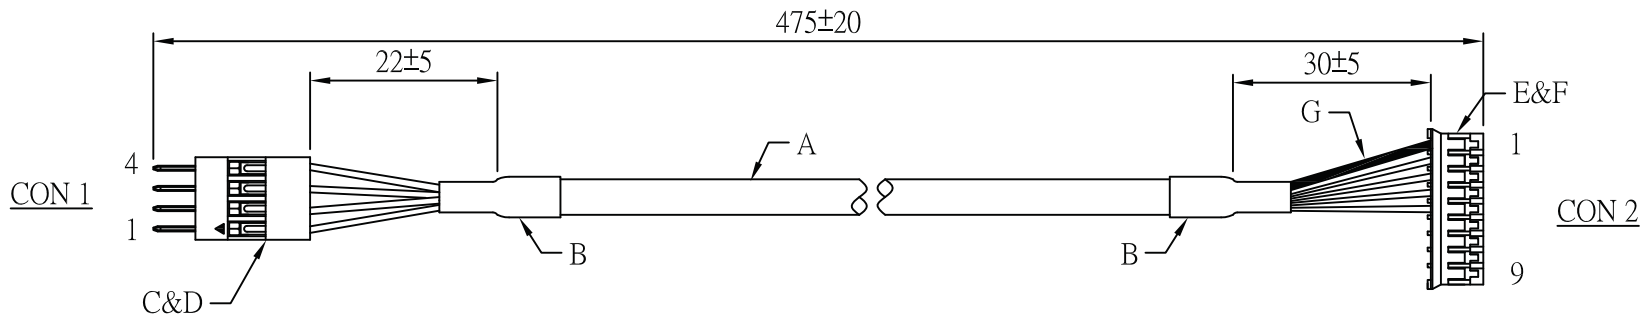

PIN LIST

CON 1		CON 2	
1	GREEN	5	
2	BLACK	2	
3	RED	4	
4	BROWN	3	
	BRAID	1	

NOTE:

1. LENGTH OF WIRE-CUTTING:465±3mm ;
2. THE LENGTH OF JACKET STRIPPING:30±2;
3. THE FORCE OF TERMINAL AND WIRE SHOULD BE OVER 1.5kg ;
4. 100% INSULATION,SHORT,MISS-WIRE TEST ,
5. TEST CONDITION : CT ≤ 1Ω IS ≥ 5MΩ .

NO	NAME	VENDOR	SPECIFICATION	QTY
G	H.S.TUE	WOER OR EQUAL	OD*L=1.0*32mm BLACK (THICK)	1PCS
F	TERMINAL	FUCONN OR EQUAL	200PH-T (12001TOP-2 or EQUAL)	5PCS
E	HOUSING	FUCONN OR EQUAL	200PH-09P (12001H00-9P or EQUAL) PH:2.00mm	1PCS
D	TERMINAL	TYU OR EQUAL	254DH-TM (TB5005TBM-AE or EQUAL) 公端鍍錫端子	4PCS
C	HOUSING	TYU OR EQUAL	254DH-1*8P (TU5005HNO-1*04P or EQUAL) PH:2.54mm	1PCS
B	H.S.TUBE	WOER OR EQUAL	OD*L=5.0*15mm BLACK (THICK)	2PCS
A	CABLE	COPARTNER OR EQUAL	UL 2464 #28*4C+AL+SP OD:4.3mm 黑色 或 貝吉色 L=465mm	1PCS

REV	ECN NO	DATE
2	增加線材前顏色	11.03.18

UNIT. mm	SCALE. NONE		GENERAL TOLERANCE		DRAWN <i>CHUN Y</i>	DATE 2011.03.18	DWG. NO. 10002340	TITLE 254DH-1*4P TO 200PH-09P L=475mm				
			X. ±	.X ±					CHECK	DATE		
			X. ±	.X ±								
			XX. ±	.XX ±							APPROVE	DATE
			XXX. ±	.XXX ±								
		PARTS. NO. 94-51040-000	(江川)									