


V1.4	CHANGE PIN	06.03.14	REV	ECN NO	DATE
			V1.0	RELEASE	03.03.10
			V1.1	材料說明	03.04.19
				材料用量	03.08.16
				材料用量	04.12.13

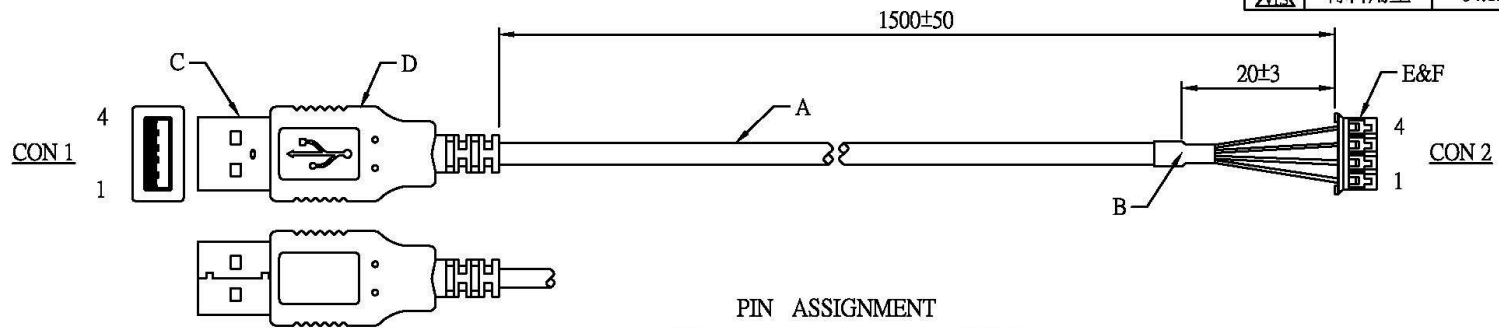

PIN ASSIGNMENT

CON 1		CON 2
1	— RED (#24)	1
2	— WHITE (#28)	2
3	— GREEN (#28)	3
4	— BLACK (#24)	4
SHELL	—	

NOTE:  
(說明):

1. LENGTH OF CABLE-CUTTING: 1550±10mm;  
(1. CABLE 裁線長度: 1550±10mm)
2. THE LENGTH OF JACKET STRIPPIN OF CON1: 13±2mm;  
THE LENGTH OF JACKET STRIPPIN OF CON2: 25±2mm;  
(2. CABLE CON1端剝外被長度: 13±2mm; CON2端剝外被長度: 25±2mm)
3. 100% INSULATION SHORT MISS-WIRE TEST;  
(3. 100% 絕緣、短路、反線測試)
4. TEST CONDITION: CT ≤ 2Ω IS ≥ 5MΩ.  
(4. 測試條件: CT ≤ 2Ω IS ≥ 5MΩ)

	F	TERMINAL	HR OR EQUAL	200PH-T (A2001-TP or EQUAL)	4PCS
	E	HOUSING	HR OR EQUAL	200PH-04P (A2001H-4P or EQUAL)	1PCS
	D	外模	裕順榮 OR EQUAL	PVC-45P 貝吉色	6.0g
	C	CONN	QIAO YU OR EQUAL	USB A TYPE 公頭 白色膠芯 端子鍍一般金	1SET
	B	H.S.TUBE	WOER OR EQUAL	OD*L=5.0*10mm BLACK	1PCS
	A	CABLE	COPARTNER OR EQUAL	UL 2725 #24*2C+#28*1P+AEB 貝吉色 L=1550mm	1PCS
	NO	NAME	VENDOR	SPECIFICATION	QTY

UNIT. mm	SCALE. NONE		GENERAL TOLERANCE		DRAWN <i>Lei J. Lee</i>	DATE <i>2006.03.14</i>	DWG. NO. HTW-0075C	TITLE USB TO 200PH-04P L=1500mm		
			X. ±	.X ±					CHECK	DATE
			XX. ±	.XX ±					APPROVE	DATE
			XXX. ±	.XXX ±						
					PARTS. NO. A017-0016					