

# APPROVAL SHEET

## WW25Q

$\pm 1\%$ ,  $\pm 5\%$

Metal low ohm power chip resistors

Size 2512 (6432), 1W

RoHS Exemption free and Lead free products

Halogen free

Sensing Type

\*Contents in this sheet are subject to change without prior notice.

## FEATURE

1. Ultra low and stable TCR performance
2. High power rating and compact size
3. High reliability and stability
4. Reduced size of final equipment
5. RoHS exemption free and Lead free product
6. Excellent Heat dissipation and inrush withstand

## APPLICATION

- Power supply
- PDA
- Digital meter
- Computer
- Automotives
- Battery charger
- DC-DC power converter

## DESCRIPTION

The resistors are constructed in a high grade low resistive metal body. The structure applies no trimming configuration to provide excellent heat dissipation and inrush withstand capability. The resistive layer is covered with a protective coat and printed a resistance marking code over it. Finally, the two external end terminations are added. For ease of soldering the outer layer of these end terminations is a Lead free terminations.




Fig 1. Construction of Chip-R

## QUICK REFERENCE DATA

Item	General Specification	
Series No.	WW25Q	
Size code	2512 ( 6432 )	
Resistance Tolerance	±5% , ±1%	
Resistance Range	1mΩ	2mΩ ~ 15mΩ
TCR (ppm/°C)	±75 ppm/°C	±100 ppm/°C
Max. power at T <sub>amb</sub> =70°C	1 W	
Max. Operation Current (DC or RMS)	31.6A ~ 8.16A	
Climatic category (IEC 60068)	55/155/56	

Note : Max. Operation Current : So called RCWC (Rated Continuous Working Current) is determined by

$$RCWC = \sqrt{\text{Rated Power} / \text{Resistance Value listed above.}}$$



## MECHANICAL DATA (unit : mm)

Type	Size (inch)	Resistance	L (mm)	W (mm)	H (mm)	C (mm)	D (mm)
WW25Q	2512	1mΩ	6.3±0.25	3.2±0.25	0.38±0.15	2.20±0.25	
		2mΩ				1.10±0.25	
		3mΩ		3.1±0.25	0.48±0.15	1.10±0.25	
		4mΩ			0.37±0.15	2.20±0.25	
		5mΩ			0.34±0.15	1.95±0.25	
		6mΩ				1.75±0.25	
		7mΩ				1.40±0.25	
		8mΩ				1.10±0.25	
		9mΩ				0.90±0.25	
		10mΩ			0.23±0.15	1.75±0.25	
		11mΩ				1.55±0.25	
		12mΩ				1.35±0.25	
		13mΩ				1.25±0.25	
		14mΩ				1.05±0.25	
		15mΩ				0.95±0.25	

## MARKING

Each resistor is marked with a four-digit code on the protective coating to designate the nominal resistance value.

Example:

$$R005 = 0.005\Omega$$

$$R010 = 0.010\Omega$$

## FUNCTIONAL DESCRIPTION

### Derating curve

The power that the resistor can dissipate depends on the operating temperature; see Fig.2

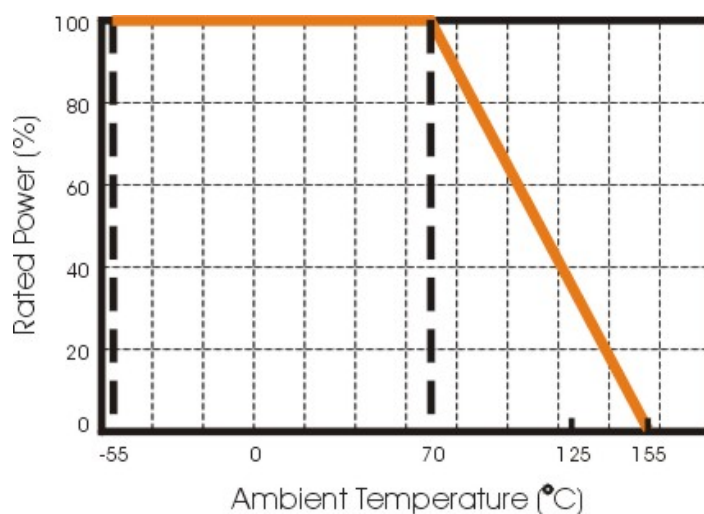


Fig.2 Maximum dissipation in percentage of rated power  
As a function of the ambient temperature

## MOUNTING

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems.

Chip placement can be on ceramic substrates and printed-circuit boards (PCBs).

Electrical connection to the circuit is by individual soldering condition.

The end terminations guarantee a reliable contact.

## SOLDERING CONDITIONS

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260°C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs).

Surface Mount Resistors are tested for solderability at 235°C during 2 seconds within lead-free solder bath. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in Fig

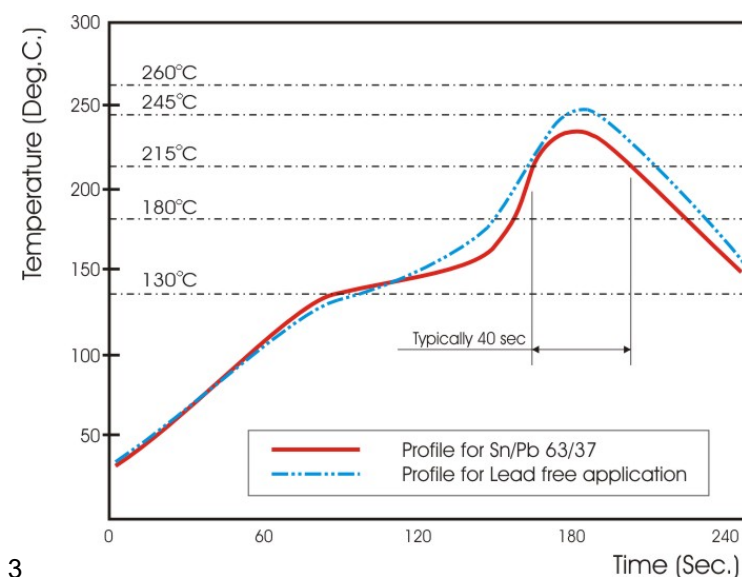


Fig 3. Infrared soldering profile for Chip Resistors WW25Q

## CATALOGUE NUMBERS

The resistors have a catalogue number starting with .

WW25	Q	R005	J	T	L
<b>Size code</b> WW25 : 2512	<b>Type code</b> Q : 1W	<b>Resistance code</b> R is first digit followed by 3 significant digits. 0.010Ω = R010 0.005Ω = R005	<b>Tolerance</b> J : ±5% F : ±1%	<b>Packaging code</b> T : 7" reeled in tape	<b>Termination code</b> L = Sn base (lead free)

Reeled tape packaging : 12mm width embossed taping 4,000pcs per reel.

## TEST & REQUIREMENTS (JIS C 5201-1 : 1998)

Table- 4(1)

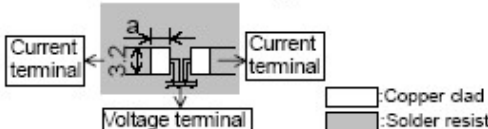
No.	Test items	Condition of test (JIS C 5201-1)	Performance requirements
1	Visual examination	Sub-clause 4.4.1 Checked by visual examination.	As in 4.4.1 The marking shall be legible, as checked by visual examination.
2	Dimension  Resistance	Sub-clause 4.4.2  Resistance value shall be measured by mounting the substrate of the following condition.   <p>a: 3mm (1mΩ), 2.6mm (5mΩ), 1.8mm (10mΩ, 15mΩ) Thickness of copper clad: 0.035mm 4-Terminal method Measurement current: 1(A) Note: The measuring apparatus corresponding to DC Low-ohm Meter (1A) of AX-1152D for ADEX CORPORATION.</p>	As specified in Table-3 of this specification. As in 4.5.2 The resistance value shall correspond with the rated resistance taking into account the specified tolerance.
3	Voltage proof	Sub-clause 4.7 Method: 4.6.1.4(See Figure-5) Test voltage: Alternating voltage with a peak value of 1.42 times the insulation voltage. Duration: 60 s±5 s Insulation resistance Test voltage: Insulation voltage Duration: 1 min.	No breakdown or flash over  R ≥ 1 GΩ
4	Solderability	Sub-clause 4.17 Without aging Flux: The resistors shall be immersed in a non-activated soldering flux for 2 s. Bath temperature: 235 °C±5 °C Immersion time: 2 s±0.5 s	As in 4.17.4.5 The terminations shall be covered with a smooth and bright solder coating.
5	Mounting  Overload (in the mounted state)  Solvent resistance of the marking	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3 Sub-clause 4.13 The applied voltage shall be 2.5 times the rated voltage or the current corresponding to. Duration: 2 s Visual examination Resistance Sub-clause 4.30 Solvent: 2-propanol Solvent temperature: 23 °C±5 °C Method 1 Rubbing material: cotton wool Without recovery	No visible damage Δ R ≤ ±1% Legible marking

Table-4(2)

No	Test items	Condition of test (JIS C 5201-1)	Performance requirements
6	Mounting  Bound strength of the end face plating  Final measurements	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-4 Sub-clause 4.33 Bent value: 1 mm Resistance Sub-clause 4.33.6 Visual examination	$\Delta R \leq \pm 1\%$  No visible damage
7	Resistance to soldering heat   Component resistance      solvent	Sub-clause 4.18 Solder temperature: $260\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ Immersion time: $10 \pm 0.5\text{ s}$ Visual examination  Resistance Sub-clause 4.29 Solvent: 2-propanol Solvent temperature: $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ Method 2 Recovery: 48 h Visual examination Resistance	As in 4.18.3.4 No sign of damage such as cracks. $\Delta R \leq \pm 1\%$  No visible damage $\Delta R \leq \pm 1\%$
8	Mounting  Adhesion  Rapid change temperature	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3 Sub-clause 4.32 Force: 5 N Duration: $10 \pm 1\text{ s}$ Visual examination Sub-clause 4.19 Lower category temperature: $-55\text{ }^{\circ}\text{C}$ Upper category temperature: $+155\text{ }^{\circ}\text{C}$ Duration of exposure at each temperature: 30 min. Number of cycles: 5 cycles. Visual examination Resistance	No visible damage       No visible damage $\Delta R \leq \pm 1\%$



Table-4(3)

No	Test items	Condition of test (JIS C 5201-1)	Performance requirements
9	Climatic sequence -Dry heat  -Damp heat, cycle (12+12hour cycle) First cycle  -Cold  -Damp heat, cycle (12+12hour cycle) Remaining cycle  -D.C. load	Sub-clause 4.23 Sub-clause 4.23.2 Test temperature: +155 °C Duration: 16 h  Sub-clause 4.23.3 Test method: 2 Test temperature: 55 °C [Severity(2)] Sub-clause 4.23.4 Test temperature -55 °C Duration: 2h  Sub-clause 4.23.6 Test method: 2 Test temperature: 55 °C [Severity (2)] Number of cycles: 5 cycles Sub-clause 4.23.7 The applied current shall be the rated current. Duration: 1 min. Visual examination Resistance	No visible damage $\Delta R \leq \pm 5 \%$
10	Mounting          Endurance at 70 °C	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3   Sub-clause 4.25.1 Ambient temperature: 70 °C $\pm$ 2 °C Duration: 1000 h The current shall be applied in cycles of 1.5 h on and 0.5 h. The applied current shall be the rated current Examination at 48 h, 500 h and 1000 h: Visual examination Resistance	No visible damage $\Delta R \leq \pm 5 \%$




Table-4(4)

No	Test items	Condition of test (JIS C 5201-1)	Performance requirements
11	Mounting  Variation of resistance with temperature	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3  Sub-clause 4.8 +20 °C / +155 °C	As in Table-1
12	Mounting  Damp heat, steady state	Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3  Sub-clause 4.24 Ambient temperature: 40 °C±2 °C Relative humidity: 93 <sup>+2</sup> <sub>-3</sub> % Without current applied. Visual examination  Resistance	No visible damage Legible marking $\Delta R \leq \pm 5\%$
13	Dimensions (detail)  Mounting  Endurance at upper category temperature	Sub-clause 4.4.3  Sub-clause 4.31 Substrate material: Epoxide woven glass Test substrate: Figure-3  Sub-clause 4.25.3 Ambient temperature: 155 °C±2 °C Duration: 1000 h Examination at 48 h, 500 h and 1000 h: Visual examination Resistance	As in Table-4          No visible damage $\Delta R \leq \pm 5\%$



## PACKAGING


Plastic Tape specifications (unit :mm)

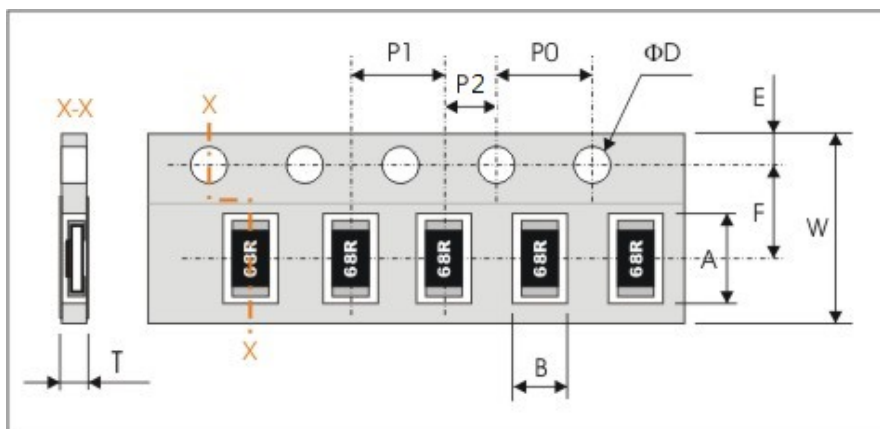

Symbol	A	B	W	F	E
Dimensions	$6.75 \pm 0.20$	$3.50 \pm 0.20$	$12.00 \pm 0.30$	$5.50 \pm 0.10$	$1.75 \pm 0.10$

Symbol	P1	P0	P2	ΦD	T
Dimensions	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.10$	$\Phi 1.50^{+0.1}_{-0.0}$	$0.90 \pm 0.20$

## Reel dimensions

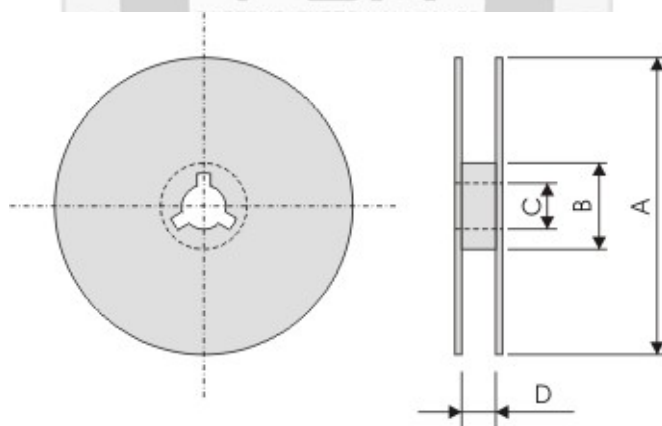

Symbol	A	B	C	D
(unit : mm)	$\Phi 180.0 \pm 1.5$	$\Phi 60.0 \pm 1.0$	$13.0 \pm 0.2$	$13.0 \pm 1.0$

## Taping quantity

- Chip resistors 4,000 pcs per reel.